


姿図

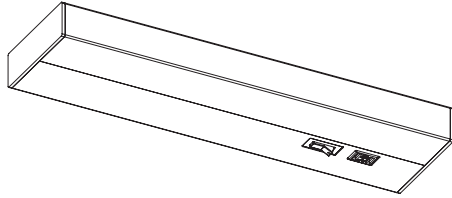


| | |
|------------------------|-----------------------------|
| 品番 | TW10040NRF |
| 光源 | LED 5.8W 5,000K |
| 定格光束 | 350 lm |
| 1/2照度角 | 65° x 72° |
| ビーム角 | 111° x 147° |
| 器具効率 上方光束 下方光束 | 100.0 % 0.0 % 100.0 % |
| 器具間隔 最大限 (取付高さH) | A 1.21 H B 1.21 H |
| 保守率 | 良 0.69 中 0.67 否 0.63 |

照明率表

| 反射率 | 天井 | 70% | | | | | | 50% | | | | | | 30% | | | | | | 0% |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 壁 | 50% | | 30% | | 10% | | 50% | | 30% | | 10% | | 50% | | 30% | | 10% | | 0% |
| | 床 | 30% | 10% | 30% | 10% | 30% | 10% | 30% | 10% | 30% | 10% | 30% | 10% | 30% | 10% | 30% | 10% | 30% | 10% | 0% |
| 照射距離 | 0.6 | 0.44 | 0.42 | 0.35 | 0.34 | 0.29 | 0.29 | 0.41 | 0.40 | 0.34 | 0.33 | 0.29 | 0.28 | 0.39 | 0.38 | 0.33 | 0.32 | 0.28 | 0.28 | 0.25 |
| | 0.8 | 0.54 | 0.51 | 0.45 | 0.43 | 0.38 | 0.37 | 0.50 | 0.48 | 0.43 | 0.41 | 0.37 | 0.36 | 0.47 | 0.46 | 0.41 | 0.40 | 0.36 | 0.35 | 0.32 |
| | 1.0 | 0.62 | 0.58 | 0.53 | 0.50 | 0.46 | 0.44 | 0.58 | 0.55 | 0.50 | 0.48 | 0.44 | 0.43 | 0.54 | 0.52 | 0.48 | 0.46 | 0.43 | 0.42 | 0.39 |
| | 1.25 | 0.70 | 0.64 | 0.61 | 0.57 | 0.54 | 0.52 | 0.65 | 0.61 | 0.58 | 0.55 | 0.52 | 0.50 | 0.61 | 0.58 | 0.55 | 0.53 | 0.50 | 0.49 | 0.45 |
| | 1.5 | 0.76 | 0.70 | 0.67 | 0.63 | 0.60 | 0.57 | 0.71 | 0.66 | 0.63 | 0.60 | 0.58 | 0.56 | 0.66 | 0.63 | 0.60 | 0.58 | 0.55 | 0.54 | 0.50 |
| | 2.0 | 0.85 | 0.77 | 0.77 | 0.71 | 0.71 | 0.66 | 0.79 | 0.73 | 0.72 | 0.68 | 0.67 | 0.64 | 0.73 | 0.70 | 0.68 | 0.66 | 0.64 | 0.62 | 0.58 |
| | 2.5 | 0.91 | 0.81 | 0.84 | 0.76 | 0.78 | 0.72 | 0.84 | 0.78 | 0.78 | 0.73 | 0.73 | 0.69 | 0.78 | 0.74 | 0.73 | 0.70 | 0.69 | 0.67 | 0.62 |
| | 3.0 | 0.95 | 0.85 | 0.88 | 0.80 | 0.83 | 0.76 | 0.88 | 0.81 | 0.82 | 0.77 | 0.78 | 0.73 | 0.81 | 0.77 | 0.77 | 0.74 | 0.73 | 0.71 | 0.66 |
| | 4.0 | 1.01 | 0.89 | 0.95 | 0.85 | 0.90 | 0.82 | 0.93 | 0.85 | 0.88 | 0.82 | 0.84 | 0.79 | 0.85 | 0.81 | 0.82 | 0.78 | 0.79 | 0.76 | 0.71 |
| | 5.0 | 1.05 | 0.92 | 1.00 | 0.88 | 0.95 | 0.85 | 0.96 | 0.87 | 0.92 | 0.85 | 0.89 | 0.82 | 0.88 | 0.83 | 0.85 | 0.81 | 0.83 | 0.79 | 0.74 |
| | 10.0 | 1.13 | 0.97 | 1.10 | 0.96 | 1.07 | 0.94 | 1.03 | 0.93 | 1.01 | 0.92 | 0.99 | 0.90 | 0.94 | 0.89 | 0.93 | 0.88 | 0.91 | 0.86 | 0.81 |


配光曲線

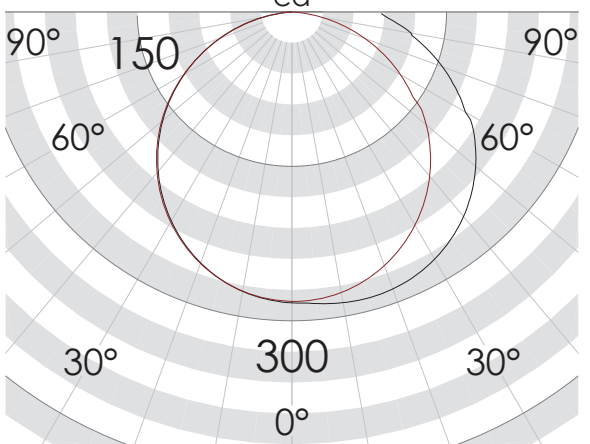

最大光度 280.9

[cd/光源光束1000lm]

水平面照度

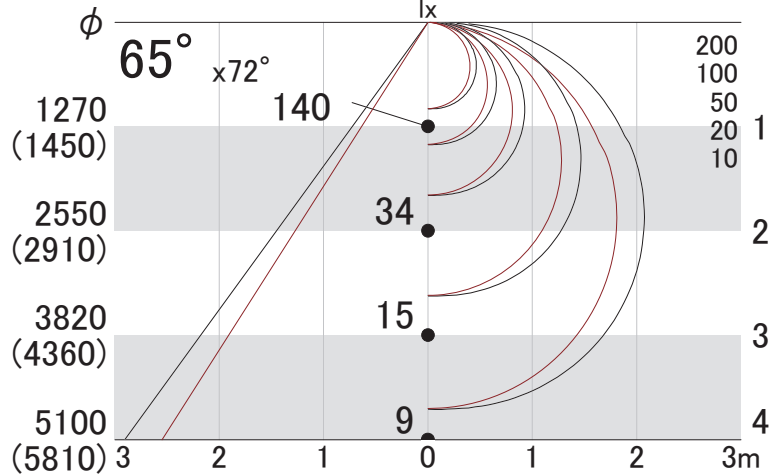

水平距離 (m)

※保守率は、含みません。

